

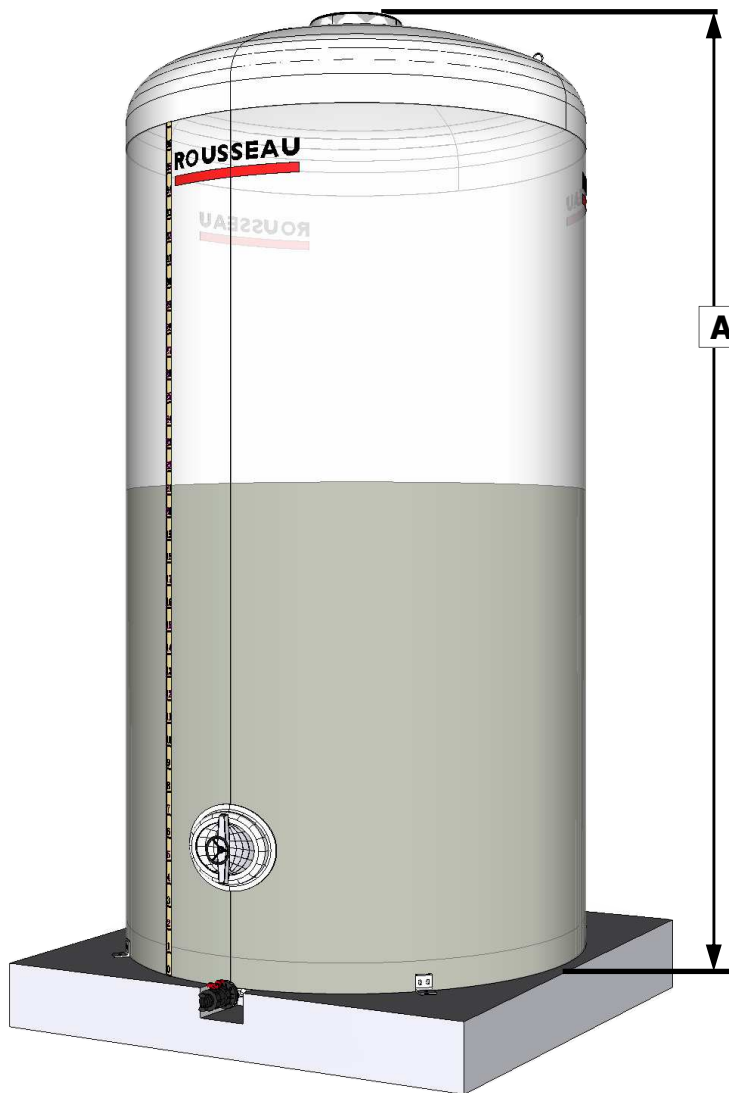


## Cuve engrais fond plat avec vidange totale



Béton dosé à 350 Kg/m<sup>3</sup>, ép: 400 mm

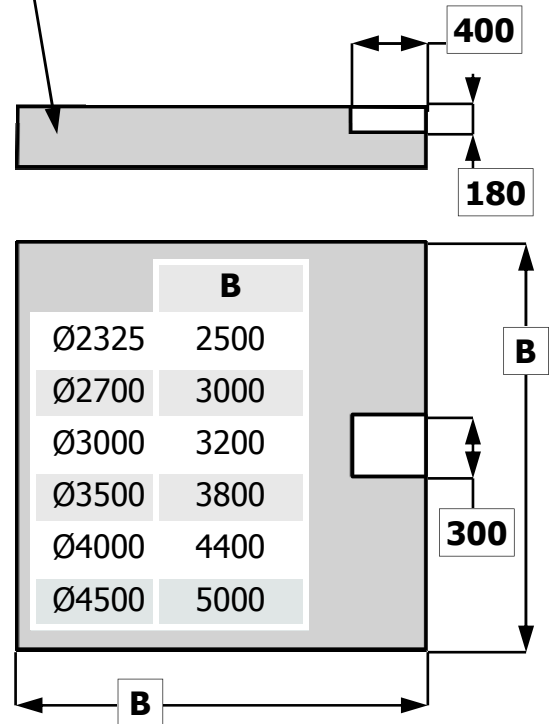

**En option: capot de protection cadenassable**

	A										
	6 m <sup>3</sup>	10 m <sup>3</sup>	15 m <sup>3</sup>	20 m <sup>3</sup>	22 m <sup>3</sup>	25 m <sup>3</sup>	30 m <sup>3</sup>	40 m <sup>3</sup>	50 m <sup>3</sup>	60 m <sup>3</sup>	63 m <sup>3</sup>
Ø2325	1773	2708	3888	5063	5533						
Ø2700				3905		4780	5655				
Ø3000							4664	6079	7494	8909	9189

	A								
	70 m <sup>3</sup>	80 m <sup>3</sup>	90 m <sup>3</sup>	100 m <sup>3</sup>	125 m <sup>3</sup>	150 m <sup>3</sup>	160 m <sup>3</sup>	180 m <sup>3</sup>	200 m <sup>3</sup>
Ø3500	7660								
Ø4000		6760							
Ø4500			6100	6730	8400	10050	10680	11940	13200



ROUSSEAU S.A.S - 79160 Fenioux - France  
 Tél: +33 (0)5 49 75 22 06 - Fax: +33 (0)5 49 75 24 44  
<http://www.rousseau.fr> - [rouplast@rousseau.fr](mailto:rouplast@rousseau.fr)

**ROUSSEAU**  
 LA FORCE DE L'EXPERIENCE